



ACE7233Z

18V, 3A, High Efficiency Synchronous Step-Down Converter

Description

ACE7233Z is a wide input range, high-efficiency and high frequency DC-to-DC step-down switching regulator, capable of delivering up to 3A of output current. It adopts an Adaptive COT control scheme that enables very fast transient response and provides a very smooth transition when the output varies from light load to heavy load. During light load, ACE7233Z goes into a PFM mode that saves switching loss achieving high efficiency. The adaptive COT control also maintains a constant switching frequency across line and load. An OVP function protects the IC itself and its downstream system against input voltage surges. With this OVP function, the IC can stand off input voltage as high as 18V, making it an ideal solution for industrial applications such as LCD TV, Set Top Box, Portable TV, etc.

Features

- Wide Input Range: 4.5V-18V
- Adaptive COT Control
- Ultra-fast load transient response
- High Efficiency PFM mode at light load
- High Efficiency Synchronous operation
- No load IQ 180uA
- Low $R_{DS(on)}$ Internal power FETs
- Capable of Delivering 3A
- No External Compensation Needed
- Thermal Shutdown and UVLO
- Available in SOT23-6 Package

Application

- LCD TV
- Set Top Box
- xDSL Modem
- Distributed Power System
- Flat Panel Television and Monitors



ACE7223Z

18V, 3A, High Efficiency Synchronous Step-Down Converter

Absolute Maximum Ratings

Parameter		Value
IN, EN Voltage		-0.3V to 18V
SW Voltage		-0.3V (1) to 18V (2)
BST Voltage		-0.3V to SW+6V
FB Voltage		-0.3V to 6V
Junction Temperature		150°C
Storage Temperature Range		-55°C to 150°C
JESD51-3(3)	θ_{JA}	180°C/W
	θ_{JC}	90°C/W
EVB (4)	θ_{JA}	80°C/W
	θ_{JC}	30°C/W
Power Dissipation (5)		1.5W
Lead Temperature (Soldering 10ssec)		260°C

Note:

- 5V for <10nS.
- 23V for <10nS.
- These values are calculated in accordance with JESD51-3 and simulated on a JEDEC board, they are only valid for comparison between different packages, cannot be used for thermal design.
- Measured on 1OZ two-layer ETA evaluation board, $T_A=25^\circ\text{C}$: the top of SOT23-6 package is the position where θ_{JC} measured.
- Power Dissipation is calculated by $PD=(T_{jmax}-T_a)/\theta_{JA}$.

Recommended Operating Conditions

Parameter	Value
Ambient Temperature Range	-40°C to 85°C
Junction Temperature Range	-40°C to 125°C




ACE7223Z

18V, 3A, High Efficiency Synchronous Step-Down Converter

Ordering information

ACE7223ZXX+ H

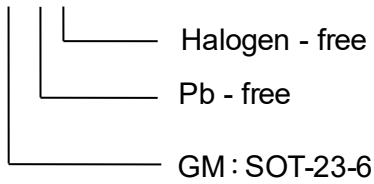



ACE7223Z

18V, 3A, High Efficiency Synchronous Step-Down Converter

Notes

ACE does not assume any responsibility for use as critical components in life support devices or systems without the express written approval of the president and general counsel of ACE Technology Co., LTD. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

ACE Technology Co., LTD.
<http://www.ace-ele.com/>