



ACE72560Z

2MHz, 3A, COT Synchronous Step-down Converter

Description

The ACE72560Z is a high-efficiency, DC-to-DC step-down switching regulator, capable of delivering up to 3A of output current. The device operates from an input voltage range of 2.5V to 6.0V and provides output voltages from 0.6V to V_{IN} , making the ACE72560Z ideal for low voltage power conversions. ACE72560Z adopts an adaptive COT control scheme that enables very fast transient response and provides a very smooth transition when the output varies from light load to heavy load. During light load, ACE72560Z goes into a PFM mode that saves switching loss to achieve a high efficiency. The adaptive COT control also maintains a constant switching frequency across line and load. Running at a fixed frequency of 2MHz allows the use of small inductance value and low DCR inductors, thereby achieving a higher efficiency. Other external components, such as ceramic input and output caps, can also be small due to higher switching frequency, while maintaining exceptional low-noise output voltages. Internal soft-start control circuitry reduces inrush current. Short-circuit and thermal-overload protection improves design reliability

Features

- Up to 96% Efficiency
- Up to 3A Max Output Current
- Adaptive COT Control
- Ultra-fast Load Transient Response
- 2MHz Frequency
- High Efficiency PFM Mode at Light Load
- 50uA Quiescent Current
- 1% Feedback Accuracy
- Adjustable Output Voltage from 0.6V
- Cycle-by-cycle Over Current Protection
- Short Circuit Protection with Hiccup Mode
- Stable with Low-ESR Output Ceramic Capacitors
- Available in DFN2x2-8L Package
- Pb Free, RoHS and REACH Compliant
- Halogen Free and “Green” Device

Application

- LCD TV
- Set Top Box
- xDSL Modem



ACE72560Z

2MHz, 3A, COT Synchronous Step-down Converter

Absolute Maximum Rating

Parameter		Value
IN, FB, EN, SW Voltage		-0.3V to 6.5V
Operating Temperature Range		-40°C to 85°C
Storage Temperature Range		-55°C to 150°C
Thermal Resistance	θ_{JA}	75°C/W
Lead Temperature (Soldering 10ssec)		260°C

Note: Exceeding these limits may damage the device. Exposure to absolute maximum rating conditions for long periods may affect device reliability.




ACE72560Z

2MHz, 3A, COT Synchronous Step-down Converter

Ordering information

ACE72560Z XX + H

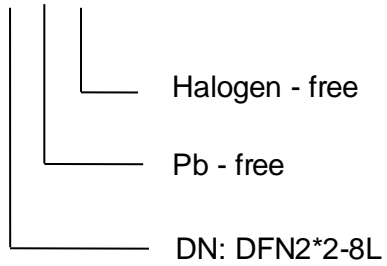



ACE72560Z

2MHz, 3A, COT Synchronous Step-down Converter

Notes

ACE does not assume any responsibility for use as critical components in life support devices or systems without the express written approval of the president and general counsel of ACE Technology Co., LTD. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

ACE Technology Co., LTD.
<http://www.ace-ele.com/>