



ACE7126Y

High Efficiency 1MHz, 2.2A Step Up Regulator

Description

ACE7126Y is a fixed frequency peak current mode asynchronous boost converter. Requires an external Schottky diode. ACE7126Y works in light load mode when the load is light, and its quiescent current is about 100 μ A. The 150m Ω $R_{DS(ON)}$ of the integrated NMOS ensures the high efficiency in all load conditions. Input voltage range is 2.3V~25V. Internal operating frequency is set to 1.0MHz.

Features

- Wide input range:
- 2.3-25V bias input, 25V Vout max
- 1MHz switching frequency
- Minimum on time: 100ns typical
- Minimum off time: 100ns typical
- Low $R_{DS(ON)}$: 0.15 Ω
- RoHS Compliant and Halogen Free
- Accurate Reference: 0.6VREF
- Compact package: SOT23-6

Application

- WLED Drivers
- Networking cards powered from PCI or PCI-express slots

Absolute Maximum Ratings

| Parameter | Rating | Unit | |
|----------------------------|---------------|------|------|
| IN, EN | 26 | V | |
| LX | 28 | V | |
| All other pins | 6 | V | |
| Power Dissipation, PD | 0.4 | W | |
| Package Thermal Resistance | θ_{JA} | 250 | °C/W |
| | θ_{JC} | 130 | |
| Junction Temperature Range | 150 | °C | |
| Lead Temperature | 260 | °C | |
| Storage Temperature Range | -65 to 150 | °C | |
| ESD | HBM | 2 | kV |

Stresses beyond those listed under “Absolute Maximum Rating” may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other condition beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.



ACE7126Y

High Efficiency 1MHz, 2.2A Step Up Regulator

Recommended Work Conditions

| Parameter | Rating | Unit |
|----------------------------|------------|------|
| IN, LX | 2.3 to 25 | V |
| All other pins | 0 to 5.5 | V |
| Junction Temperature Range | -40 to 125 | °C |
| Ambient Temperature Range | -40 to 85 | °C |

The Recommended Operating Conditions table defines the conditions for actual device operation. Recommended Operating conditions are specified to ensure optimal performance to the datasheet specifications. DIOO does not Recommend exceeding them or designing to Absolute Maximum Ratings.




ACE7126Y

High Efficiency 1MHz, 2.2A Step Up Regulator

Ordering information

ACE7126Y XX+ H

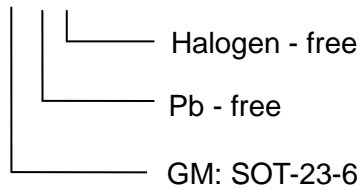

Notes

ACE does not assume any responsibility for use as critical components in life support devices or systems without the express written approval of the president and general counsel of ACE Technology Co., LTD. As sued herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

ACE Technology Co., LTD.
<http://www.ace-ele.com/>