



ACE14280B

Dual P-Channel Enhancement Mode MOSFET

Description

- Portable Equipment
- Power Management

Features

- $V_{DS} = -20V$
- $I_D = -5A$
- $R_{DS(ON)} @ V_{GS} = -4.5V$, TYP 48 m Ω
- $R_{DS(ON)} @ V_{GS} = -2.5V$, TYP 64 m Ω

Absolute Maximum Ratings

At $T_A=25^\circ C$, unless otherwise noted.

Parameter		Symbol	Ratings	Unit
Drain-Source Voltage		V_{DSS}	-20	V
Gate-Source Voltage		V_{GSS}	± 12	V
Drain Current (Continuous) ⁽¹⁾	$T_A=25^\circ C$	I_D	-5	A
	$T_A=70^\circ C$		-3.7	A
Drain Current (Pulse) ⁽²⁾		I_{DM}	-20	A
Power Dissipation	$T_A=25^\circ C$	P_D	1.9	W
Operating Temperature / Storage Temperature		T_J/T_{STG}	-55 to 150	$^\circ C$

Note:

1. The current rating is based on the $t \leq 5s$ junction to ambient thermal resistance rating.
2. Repetitive rating, pulse width limited by junction temperature.

Thermal Resistance Ratings

Parameter		Symbol	Max	Unit
Maximum Junction-to-Ambient ⁽¹⁾	$t \leq 5s$	R_{thJA}	65	$^\circ C/W$

Note:

1. The value of R_{thJA} is measured with the device mounted on 1in² FR-4 board with 2oz. Copper, in a still air environment with $T_A=25^\circ C$. The value in any given application depends on the user's specific board design.




ACE14280B

Dual P-Channel Enhancement Mode MOSFET

Ordering information

ACE14280B XX + H

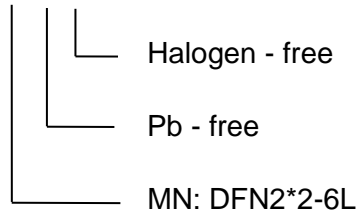



ACE14280B

Dual P-Channel Enhancement Mode MOSFET

Notes

ACE does not assume any responsibility for use as critical components in life support devices or systems without the express written approval of the president and general counsel of ACE Technology Co., LTD. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.