



ACE24LA32A

Two-wire Serial EEPROM

Description

The ACE24LA32A provides 32768 bits of serial electrically erasable and programmable read-only memory (EEPROM), organized as 4096 bytes. The device is optimized for use in many industrial and commercial applications where low-power and low-voltage operation are essential. The ACE24LA32A offers an additional page, named the Identification Page (32 bytes). The Identification Page can be used to store sensitive application parameters which can be (later) permanently locked in Read-only mode.

Features

- Compatible with all I²C Bidirectional Data Transfer Protocol
- Memory Array:
 - 32K bits (4Kbytes) of EEPROM
 - Page Size: 32 bytes
 - Additional Write Lockable Page
- Single Supply Voltage and High Speed:
 - 1.7V-5.5V/400kHz
 - 2.5V-5.5V/1MHz
 - Random and Sequential Read Modes
- Write:
 - Byte Write within 3ms
 - Page Write within 3ms
 - Partial Page Writes Allowed
- Write Protect Pin for Hardware Data Protection
- Schmitt Trigger, Filtered Inputs for Noise Suppression
- High-reliability
 - Endurance: 1 Million Write Cycles
 - Data Retention: 100 Years
- Enhanced ESD/Latch-up Protection
 - HBM 8000V
- DIP-8/ SOP-8/ TSSOP-8/ USON3*2-8/ UDFN8/ SOT-23-5/ TSOT-23-5 packages



ACE24LA32A

Two-wire Serial EEPROM

Absolute Maximum Ratings

| Items | Value |
|--|---------------------------|
| DC Supply Voltage | -0.3V to 6.5V |
| Input / Output Voltage | GND-0.3V to $V_{CC}+0.3V$ |
| Storage Temperature | -65°C to 150°C |
| Electrostatic Pulse (Human Body Model) | 8000V |

Notice:

Stresses above those listed under "Absolute Maximum Ratings" may cause permanent damage to this device. These are stress ratings only. Functional operation of this device at these or any other conditions above those indicated in the operational sections of this specification is not implied or intended. Exposure to the absolute maximum rating conditions for extended periods may affect device reliability.




ACE24LA32A

Two-wire Serial EEPROM

Ordering Information

ACE24LA32A XX XX + X H

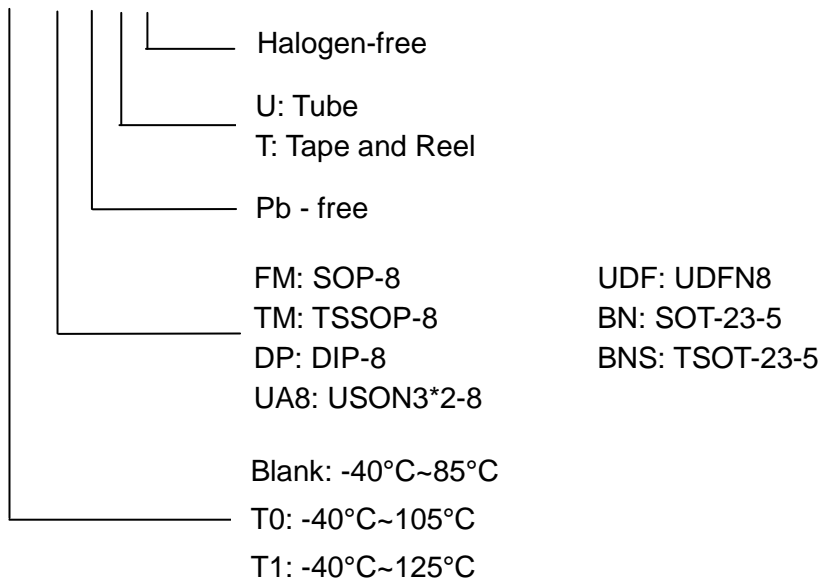



ACE24LA32A

Two-wire Serial EEPROM

Notes

ACE does not assume any responsibility for use as critical components in life support devices or systems without the express written approval of the president and general counsel of ACE Technology Co., LTD. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

ACE Technology Co., LTD.
<http://www.ace-ele.com/>